



FIRE ALARM SYSTEMS.
POWERED BY PARTNERSHIP.*

SINGLE-ACTION FIRE ALARM STATIONS

276/277B SERIES

OVERVIEW

The Kidde Cat. No. 276B/277B series noncoded fire alarm stations are contemporary styled Lexan stations and are flexibly designed to meet a wide variety of application requirements and operational sequences.

The Cat. No. 276B series are single action stations with terminals for field wiring connections.

The Cat. No. 277B series are also single action stations but use 6" (150mm) wire leads for field wiring connections.

All types are available with single or double pole alarm contacts which can be normally open, normally closed or a combination of both. Either a key or tool (depending on station selected) is required to reset mechanism. See specification chart for specific catalog numbers and features.

For semi flush mounting use a standard North-American 4 inch square box with single gang plaster cover having an overall minimum depth of 2-1/4 inches (57mm). For surface mounting use a surface back box.



S2318

7150-1657:
0111

STANDARD FEATURES

- Single action models
- Single or double pole contacts
- Terminals or wire leads for field connections
- Pre-signal or general alarm operation
- Key lock or tool reset
- Break glass operation
- Surface or semi flush mounting
- Red finish
- Contemporary styling
- Rugged LEXAN construction
- Latch action until reset

*Kidde Commercial and its authorized resellers/distributors are separate and independent entities. This relationship between vendor and reseller/distributor does not constitute a legal partnership or create any shared liability between companies.

OPERATION

To initiate an alarm and break the glass rod, pull down on the handle marked “Pull for Fire”.

The alarm handle latches in the pulled position until the station is manually reset. To reset, the station is opened using a Cat. No. 276-K1 key supplied with the station, or a tool; the toggle switch is restored to its normal position, the break glass rod is replaced and the station is reclosed. For presignal type stations, the general alarm can be initiated by authorized personnel from any operated station by inserting Cat. No. 276-K2 key into the keyswitch behind the alarm handle and turning it clockwise.

ENGINEERING SPECIFICATIONS

Furnish and install where indicated on plans, Cat. No. (*Select one of the following:*)

- (276B series single action manual stations with screw terminals)
- (277B series single action manual stations with 6 inch (150mm) wire leads)

for connection of installation wiring. All stations shall be of the noncoded break glass type.

The stations shall be constructed of red lexan with white raised letters. The alarm handle shall be marked “PULL FOR FIRE”, to provide simple, concise instructions for activation of station by the general public.

Pulling the alarm handle shall break a glass rod and activate a toggle switch which shall cause the handle to latch in the alarm position. Momentary push button type switches shall not be acceptable. To reset the station it shall be necessary to open the station using (select one) (a key) (a special tool), restore the toggle switch to its normal position and replace the glass rod.

Stations shall be UL listed.

TECHNICAL SPECIFICATIONS

Contact Ratings	
General Alarm Switch/Keyswitch	
Single Pole	3.0 Amps, 30 Vac, Resistive Load 1.0 Amps, 28 Vdc, Resistive Load
Double Pole	1.5 Amps, 30 Vac, Resistive Load 1.0 Amps, 28 Vdc, Resistive Load

Resistor Kit for use in stations connected to smoke detector circuits	
Station Housing	Red Lexan 940 with White Letters
Weight	1 lb (0.4 kg)


ACCESSORIES

276-GLR	Replacement of Glass Rods
276-K1	Station Reset Key, Supplied with all Key Reset Stations
276-K2	General Alarm Key. Must be ordered separately.
276B-RSB	Surface Back Box, Red.

Warning: *These devices will not operate without electrical power. As fires frequently cause power interruptions, we suggest you discuss further safeguards with your local fire protection specialist.*

MOUNTING

*Suitable for optional resistor kit (276-R)

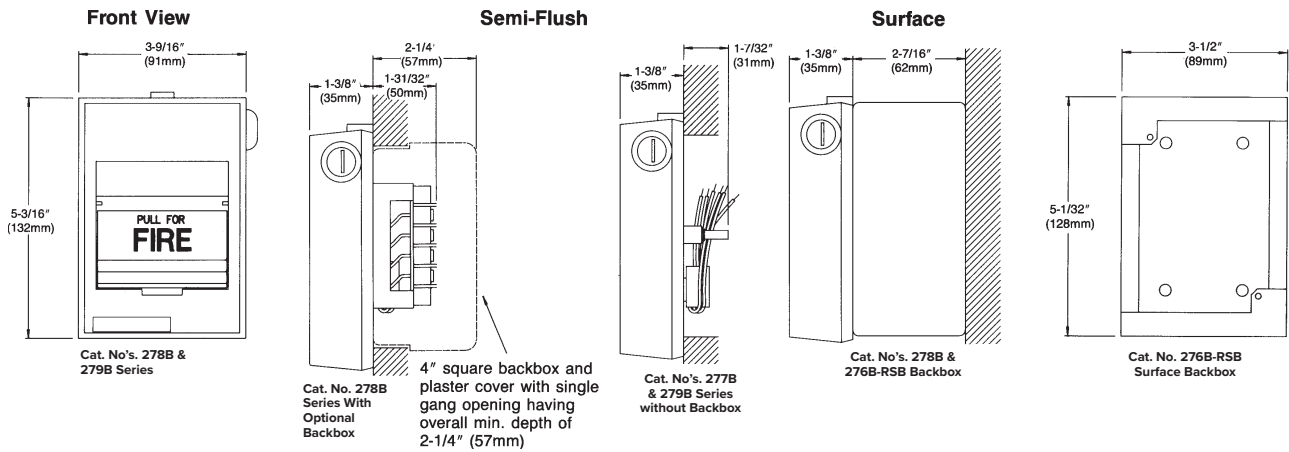

ORDERING INFORMATION

Catalog Number	Field Connections		Switch Contacts				Station Reset		Type Alarm		Agency Approvals
Single Action Pull Stations	Screw Terminals	6" (150mm) Wire Leads	Single Pole Alarm Contact	Double Pole Contact	Open Circuit	Closed Circuit	Tool Operated Reset	Key Operated Reset	Presignal Alarm Contacts	General Alarm Contacts	ULC Listed
K-276B-1110	X		X		X		X			X	X
K-276B-1120	X		X		X			X		X	X
K-276B-1320	X			X	X			X		X	X
K-277B-1110		X	X		X		X			X	X
K-277B-1120		X	X		X			X		X	X



FIRE ALARM SYSTEMS.
POWERED BY PARTNERSHIP.*

CONTACT US

Phone: 888.244.9979 (Option 4)
Email: kidde.fire@kgsolutions.com
Website: kidde-esfire.com

8985 Town Center Pkwy,
Bradenton, FL 34202

©2025 Walter Kidde Portable Equipment, LLC
All rights reserved.

*Kidde Commercial and its authorized resellers/
distributors are separate and independent entities.
This relationship between vendor and reseller/
distributor does not constitute a legal partnership
or create any shared liability between companies.