


FIRE ALARM SYSTEMS.
POWERED BY PARTNERSHIP.*

HEAVY DUTY POWER RELAYS

MR 199 SERIES

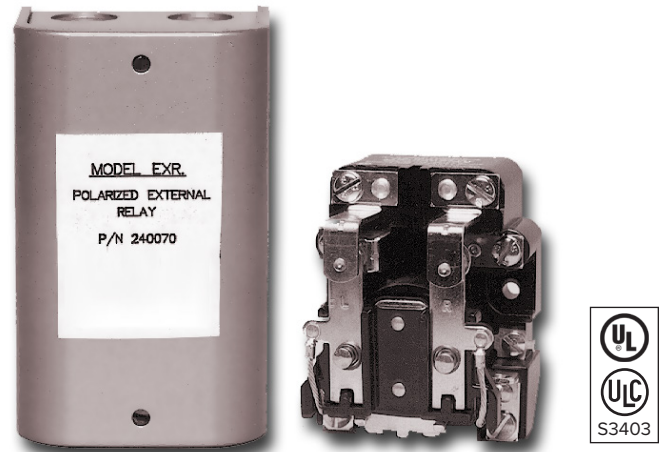


OVERVIEW

The MR 199 Heavy Duty Power Relays are designed for control applications where 30 Amp DPDT contacts are required. The relay operates with 24Vdc, which may be mounted in a rugged steel enclosure.

STANDARD FEATURES

- Heavy duty 30 Amp DPDT contacts
- 24 Vdc
- Sturdy metal enclosure

WIRING

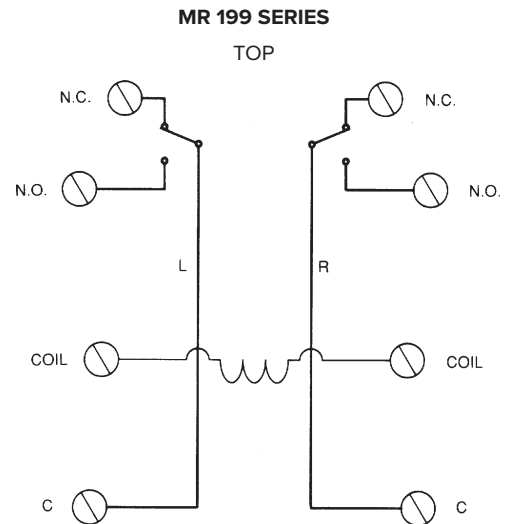



FIRE ALARM SYSTEMS.
POWERED BY PARTNERSHIP.*

CONTACT US

Phone: 888.244.9979 (Option 4)
Email: kidde.fire@kgsolutions.com
Website: kidde-esfire.com

8985 Town Center Pkwy,
Bradenton, FL 34202

©2025 Walter Kidde Portable Equipment, LLC
All rights reserved.

*Kidde Commercial and its authorized resellers/
distributors are separate and independent entities.
This relationship between vendor and reseller/
distributor does not constitute a legal partnership
or create any shared liability between companies.

SPECIFICATIONS

Contact Arrangement	DPDT Standard
Contact Rating	30 Amps @ 300 Vac, 2 HP Motor Load
Coil Power	MR199X-13:24 Vdc @ 85 mA
Temperature Range	-22°F to 122°F (-30°C to 50°C)

Dimensions

MR 199X13	3.13 H x 2.5 W X 2.31 inches (79.4 H x 63.5 W x 58.7 D mm)
MR199 X13/C	5.31 H x 3.38 W x 3.13 D inches (134.9 H x 85.9 W x 96.8 D mm)

ORDERING INFORMATION

Model	Description
MR 199X13	DPDT, 24 Vdc, relay only
MR 199X13/C	DPDT, 24 Vdc, mounted in enclosure