




FIRE ALARM SYSTEMS.
POWERED BY PARTNERSHIP.*

MULTI-VOLTAGE CONTROL RELAYS

MR100 & MR200 SERIES

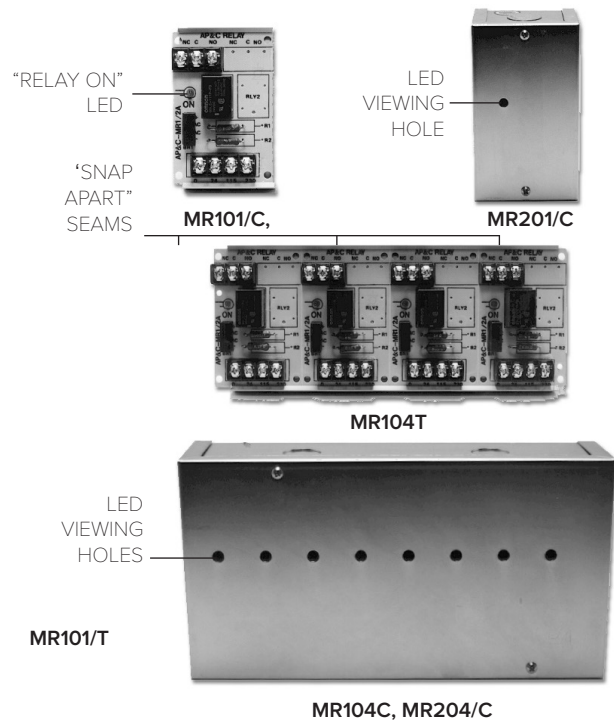

OVERVIEW

The MRSeries Multi-Voltage Control Relays offer SPDT or DPDT 10 Amp contacts which may be operated by one of four input control voltages. A single relay may be energized from a voltage source of 24 Vdc, 24 Vac, 115 Vac or 230 Vac by wiring to appropriate input terminals.

Each relay position contains a red light emitting diode (LED) which indicates the relay coil is energized. Relays may be “snapped apart” from a standard four-module assembly and used independently.


These devices are ideal for applications where local contacts are required for system status, remote contacts for control of electrical loads and general purpose switching. They are suitable for use with HVAC Temperature Control, Fire Alarm, Security, Energy Management, and Lighting Control Systems.

STANDARD FEATURES

- Each relay position may be energized from one of four input voltages
- Each relay position contains a red LED which illuminates when the coil is energized. This provides a timesaving convenience when checking an installed system; no metering is required.
- Single, dual or triple relay modules may be “snapped apart” from a standard four-position master
- SPDT or DPDT relays available
- Available in dustproof metal enclosures with LED viewing port
- Track mounting hardware to facilitate installation in standard cabinets
- UL recognized relays rated at 10 million mechanical operations
- ULI listed as control unit accessory

*Kidde Commercial and its authorized resellers/distributors are separate and independent entities. This relationship between vendor and reseller/distributor does not constitute a legal partnership or create any shared liability between companies.

INSTALLATION WIRING

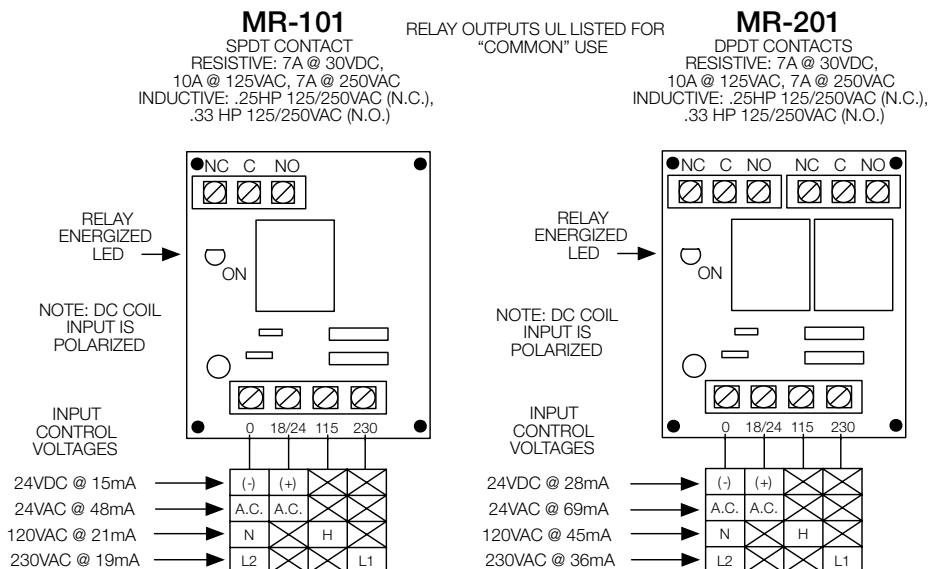

CONTACT US

Phone: 888.244.9979 (Option 4)
Email: kidde.fire@kgsolutions.com
Website: kidde-esfire.com

8985 Town Center Pkwy,
Bradenton, FL 34202

©2025 Walter Kidde Portable Equipment, LLC
All rights reserved.

*Kidde Commercial and its authorized resellers/
distributors are separate and independent entities.
This relationship between vendor and reseller/
distributor does not constitute a legal partnership or
create any shared liability between companies.

SPECIFICATIONS

Power Requirements	
MR101 Position	15 mA @ 24 Vac, 24 Vdc, 115 Vac, 230 Vac
MR201 Position	35 mA @ 24 Vac, 24 Vdc, 115 Vac, 230 Vac
Relays	
MR101	UL Recognized SPDT
MR201	UL Recognized SPDT
Enclosure	18 ga. CRS, plated with 1/2 in conduit knockouts (top and bottom)
Contact Rating	10 Amps @ 115 Vac
Ambient Temperature	-58°F to 185°F (-50°C to 85°C)
Approvals	UL Listed control unit accessory
Dimensions	
MR101/T and MR201/T	3.0 H x 2.125 W x 1.5 D in (76 H x 54 W x 38 D mm)
MR204/T	3.0 H x 8.5 W x 1.5 D in (76 H x 216 W x 38 D mm)
MR101/C and MR201/C	6.125 H x 3.25 W x 2.5 D in (156mm H x 83mm W x 64 D mm)

ORDERING INFORMATION

Model	Description
MR101/T	Single SPDT relay with LED and track mounting hardware
MR101/C	Single SPDT relay with LED mounted in metal enclosure
MR201/T	Single DPDT relay with LED and track mounting hardware
MR201/C	Single DPDT relay with LED mounted in metal enclosure
MR204/T	Four-position DPDT relay with LEDs and track mounting hardware