www.versawireless.com

TECHNICAL DATA SHEET

PRODUCT NAME
MINI-319

DESCRIPTION
Mini Wireless Magnetic Contact

PRODUCT OVERVIEW

The MINI-319 by Versa Wireless is miniature door/window transmitter compatible with 319Mhz security systems (Qolsys, GE and Interlogix). Our patented Bluefield technology simplifies installation by confirming for the installer exactly how the transmitter and magnet are aligned, eliminating guess work. The high-power magnet paired with the transmitter provided over 1.0” (25.4mm) of gap. And with our slide off lid, battery installation is a snap, however with an average battery life of 5+ years, battery replacements will be far and few between.

Slide Off Lids

Our easy to open slide off lid ensures that battery replacements and color changes are quick and easy. No need to remove the electronics from the plastics.

KEY FEATURES

- Patented Bluefield Magnet Alignment
- 5+ Year Battery Life
- Easy Open Slide Lid
- Pre-installed Adhesive Tape
- Battery Pull-Tab to Activate

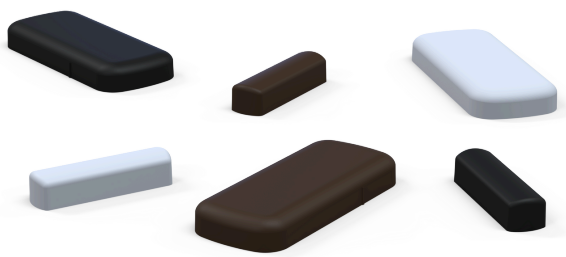

Bluefield Magnet Alignment

Patented Bluefield technology simplifies installation by showing the installer that the magnet and transmitter are clearly aligned and working.

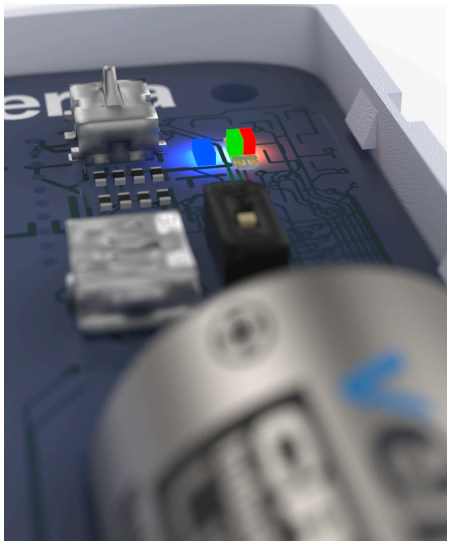

TECHINCAL SPECIFICATION

Wireless Frequency	319 MHz
Magnetic Gap	>1.0" (25.4 mm)
Mounting	Adhesive tape (included) or screws
Power	Single CR2032 battery (Panasonic)
BatteryLife	5+ years (typical)
Magnet Type	Neodymium Rare Earth
Regulatory Listings	UL639 / 1023 ULC-S304/C1023
Dimensions	1.0" (25.4 mm) x 2.2" (55.9 mm) x 0.25" (6.4 mm)
Compatibility	Qolsys / GE / Interlogix

Specifications and product details are subject to change without notice. Versa Wireless is not responsible for typographical errors or outdated information

103 - 19292 60 Ave, Surrey BC V3Z9P9 www.versawireless.com